

POLYFLOR

POLYTRED SPORT

RealOakFloors - Polytreed Sport Vinyl Floor


Heavy-duty, flexible vinyl sheet sports flooring

Designed to perform safely and effectively in multi-purpose indoor sports venues

Specification



5.5mm thick




2m x 12m = 24m² roll



4430g/m²



BS 7044: Part 4*
 DIN 18032: Part 2*
 EN 651: 1996
 *For full performance criteria conformance, contact RealOakFloors.

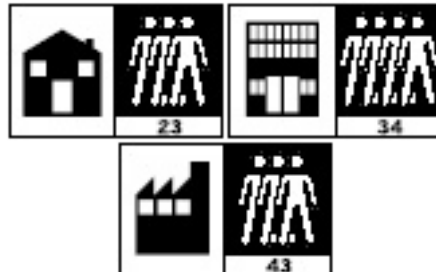

EN 13501-1 Class Bfl-S1
 EN ISO 9239-1 ≥ 8kw/m₂
 EN ISO 11925-2 Pass
 ASTM E648 Class 1



ISO 717/2 82: 20dB



EN 1815 This product does not accumulate static charges above 2kV and is classified as antistatic. For specialist applications where there is a requirement to dissipate the electrostatic charge, see the Polyflor ESD product ranges.



Class D (dry condition)



EN 651: 1996 Group M



For information regarding handling and installation, adhesives, maintenance and applications please don't hesitate to contact us. The date of issue the data presented is correct.

However, Polyflor Ltd. reserves the right to make changes which do not adversely affect performance or quality.

**FOREST FX WOODROLL FLOORS MAY INCLUDE KNOTS OR MARKINGS
AS PART OF THE DESIGN.**


14 Fantastic Colours



Dolomite



Flint



Sedona Pink



Tanzanite Blue



Turquoise

Real Oak Floors
Unit 10,
Penraevon Industrial Estate
Penraevon Street
Meanwood Road
Leeds
LS7 2AW

www.RealOakFloors.co.uk

Tel: 08700 116 914

Fax: 08709 503 019

This document was created with Win2PDF available at <http://www.daneprairie.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.